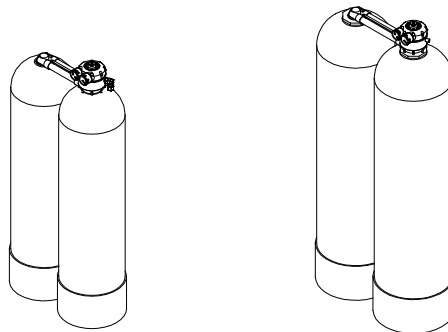





SPECIFICATION SHEET
Commercial Plus Water Softener Systems
CP Series





Specifications		CP 213s OD	CP 216s OD
Tank Size		13" x 54"	16" x 65"
System Size (width x depth x height)		27" x 13" x 60"	33" x 16" x 71"
Resin Volume per Tank		2.5 ft ³	4.0 ft ³
Regeneration Time / Volume		90 min / 142 gal	90 min / 160 gal
Brining Levels		15 lb. / 25 lb.	25 lb. / 40 lb.
Recommended Brine Tank Size		24" x 40" (500 lb.)	24" x 40" (500 lb.)
Flow Meter		Full Louver	Open Louver
Meter Range		0.75 - 40 gpm	1.1 - 50 gpm
Flow Range (15 / 30 psig) Overdrive		28 - 40 gpm	35 - 47 gpm
Alternating		20 - 30 gpm	23 - 33 gpm
Max Hardness (Overdrive / Alternating)		40 / 51 gpg	40 / 49 gpg
Maximum Volume between Regenerations		8,922 gallons	15,192 gallons
Flow Meter Options			
 Half Louver Nozzle	Flow Range	0.3 - 22.0 gpm	0.3 - 25.0 gpm
 Full Louver Nozzle (Standard with CP213s)	Flow Range (OD) Flow Range (ALT)	0.75 - 40.0 gpm 0.75 - 30 gpm	0.75 - 40.0 gpm 0.75 - 30 gpm
 Open Louver Nozzle (Standard with CP216s)	Flow Range (OD) Flow Range (ALT)	1.1 - 45 gpm 1.1 - 33 gpm	1.1 - 47 gpm 1.1 - 33 gpm
Remote Start	Flow Range	0 - 45 gpm	0 - 50 gpm
	Start Signal Flow	0.5 gpm	0.5 gpm
	Start Signal Pressure	15 psi	15 psi
	Start Signal Time	15 min	15 min